


## CAD Series

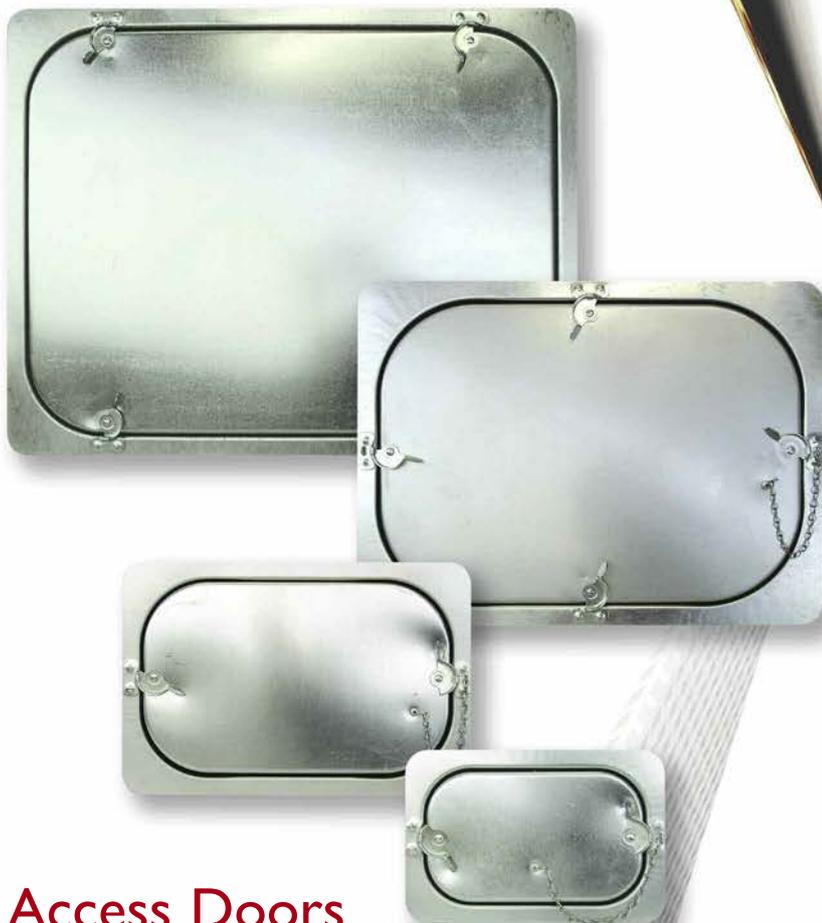

### Access Doors

- Mounting frame pre-punched fixing holes
- High compression positive seal gasket
- Safety chain as standard
- Easy action camlock fasteners with positive retaining function
- Conforms to DWI44 Classes A, B and C
- Complies with Eurovent 2/2 as relevant
- Tested up to 1500Pa

### Introduction

The CAD Series Access Doors have been subjected to extensive market and engineering research resulting in a strong and robust construction, designed in a range of sizes to meet most ductwork access requirements.

After exhaustive leakage testing, the position and number of cam and lock fasteners have been determined to provide maximum seal properties. It is therefore important that the cam and lock fasteners are properly sealed on the doors to prevent the frame from curling away from the lid when the ducting 'pants' under internal pressure.


The leakage testing has been verified by independent laboratory testing (see Testing Data below).

The CAD Series Access Doors are available in a range of sizes and are suitable for plain or insulated ductwork under low, medium or high pressures.

### Size Selection

There are four sizes of CAD Access Doors, selected after extensive research to meet the requirements of code, job site, duct cleaning and maintenance.

The size range allows a graduated degree of access as illustrated below, enabling the most appropriate size of door to be used for a particular application.

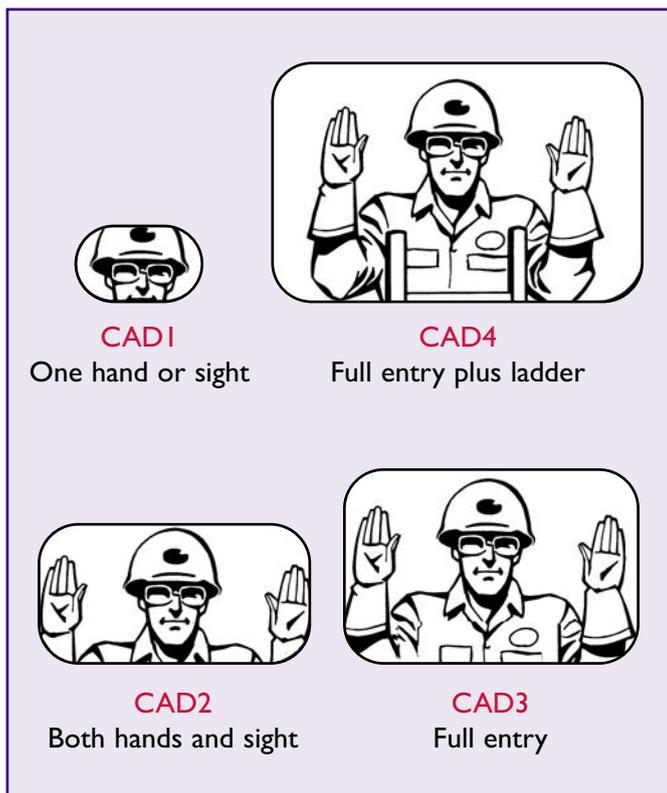





### Features

- Choice of 4 ergonomic sizes to suit most applications
- Suitable for medium and low pressure systems
- Suitable for plain and insulated ductwork
- Double skin door encapsulating a fire retardant thermal and acoustic insulation
- Seamless one piece mounting frame with pre-punched inner flange for easy installation
- One piece high compression positive seal gasket
- Progressive camlock fasteners
- Safety retaining chain fitted as standard
- Cut-out template provided, please see packaging
- Conforms to DWI44 Classes A, B & C, in addition to Eurovent 2/2 as relevant

### Leakage Testing Data DWI44 Class C = 0.35 l/sec/m<sup>2</sup>

= permitted leakage at high pressure

= test performance

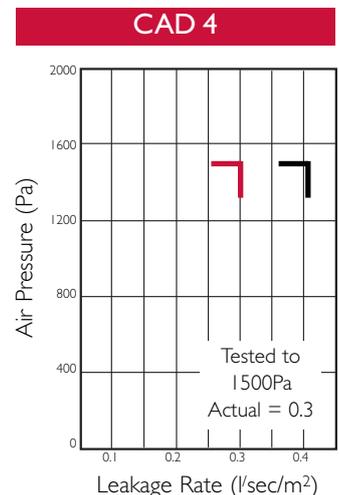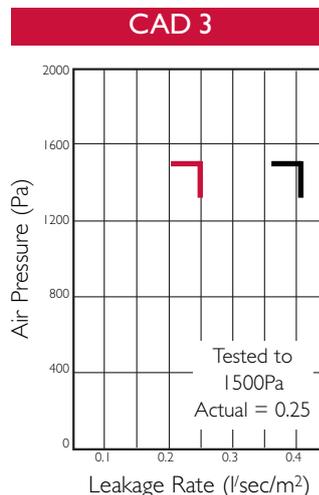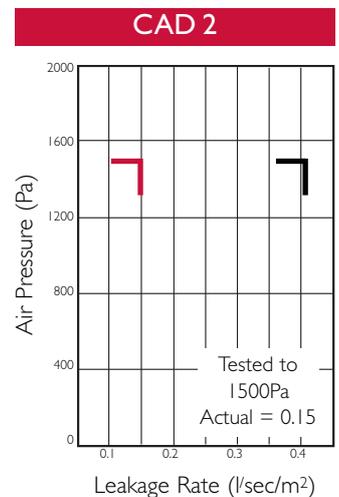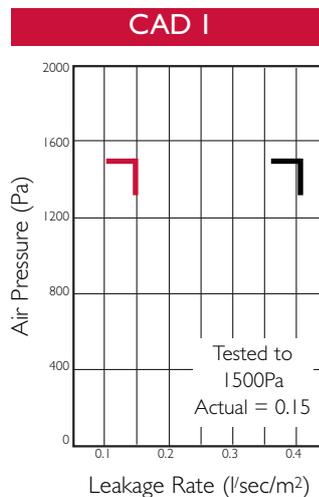

### Dimensions


| CAD 1             |                   |     |     |     |     |     |     |
|-------------------|-------------------|-----|-----|-----|-----|-----|-----|
| Nominal Door Size | No. Cams per Door | A   | B   | C   | D   | E   | F   |
| 233 x 143         | 2                 | 205 | 115 | 237 | 147 | 281 | 191 |

| CAD 2             |                   |     |     |     |     |     |     |
|-------------------|-------------------|-----|-----|-----|-----|-----|-----|
| Nominal Door Size | No. Cams per Door | A   | B   | C   | D   | E   | F   |
| 362 x 227         | 2                 | 330 | 195 | 367 | 232 | 414 | 279 |


| CAD 3             |                   |     |     |     |     |     |     |
|-------------------|-------------------|-----|-----|-----|-----|-----|-----|
| Nominal Door Size | No. Cams per Door | A   | B   | C   | D   | E   | F   |
| 494 x 354         | 4                 | 460 | 320 | 500 | 360 | 552 | 412 |

| CAD 4             |                   |     |     |     |     |     |     |
|-------------------|-------------------|-----|-----|-----|-----|-----|-----|
| Nominal Door Size | No. Cams per Door | A   | B   | C   | D   | E   | F   |
| 647 x 496         | 4                 | 610 | 462 | 653 | 502 | 705 | 550 |


### Mounting Methods

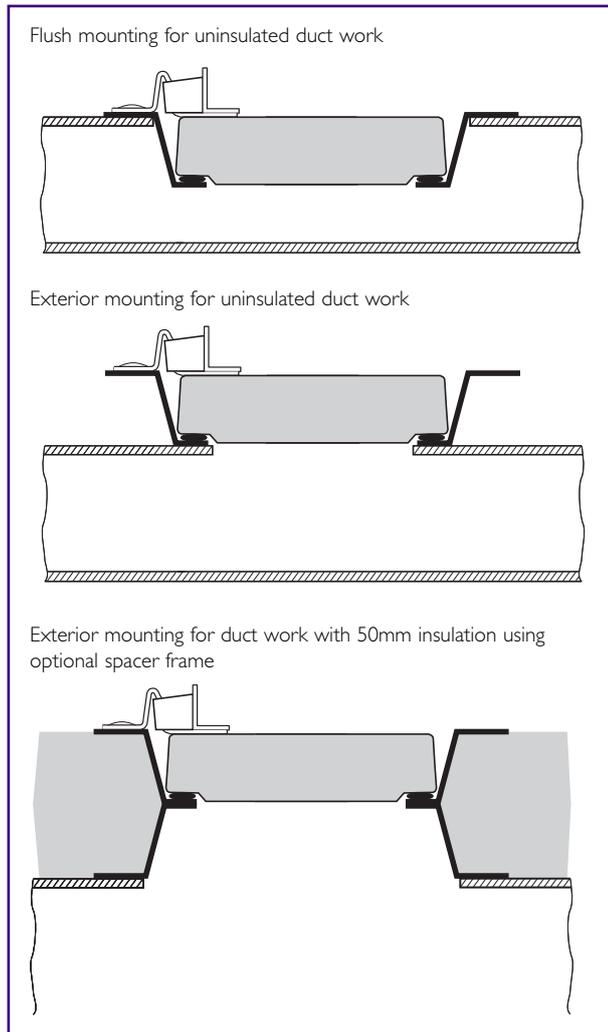


### CAD 1

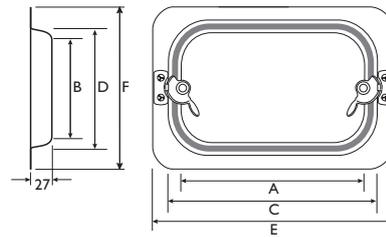


### CAD 2

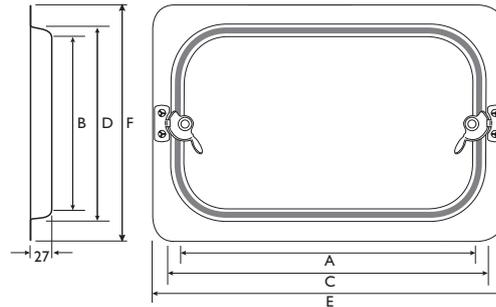

### CAD 3

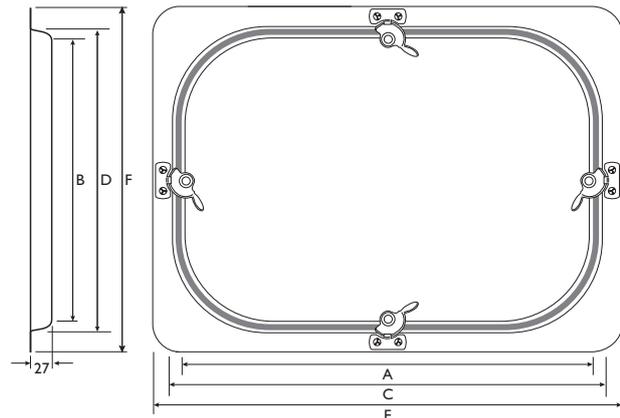

### CAD 4

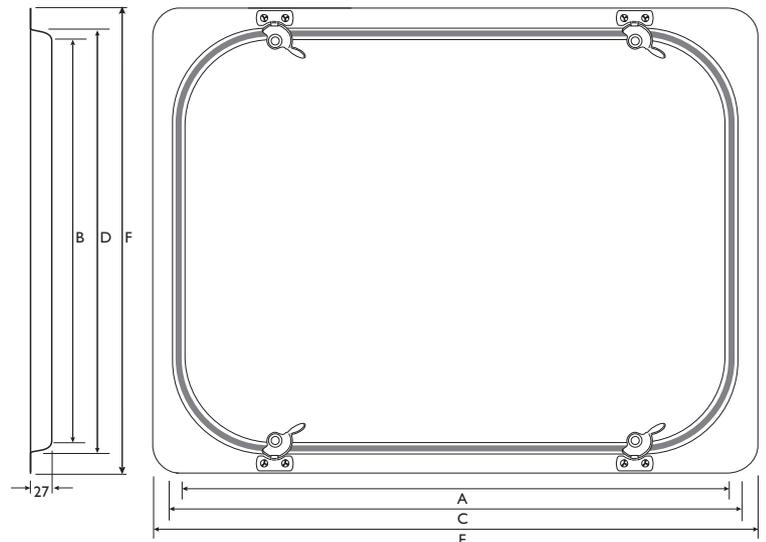

### Options

A spacer frame is available for 50mm insulated ducts (See mounting methods left)

# CAD Series

## Access Doors – Specifications, Weights and Ordering Codes



### Product Specification

#### Door

The door is a two panel design for a strong and robust assembly. The inner and outer panels are pressed from 0.7mm (24swg) galvanised mild steel to BS EN 10142 1991 for models CAD1, CAD2 and CAD3, and 0.8mm (22swg) galvanised mild steel to BS EN 10142 1991 for model CAD4. Standard thickness is 25mm nominal.

#### Insulation

20mm thick insulation is totally contained between the door panels. The insulation has excellent thermal, acoustic and fire resistant properties with a thermal density of 40kg m<sup>3</sup>.

#### Seal

Extruded seal with welded seam incorporating an integral flexible "hollow tube" which ensures low leakage performance is fitted between the two door panels for strength and stability.

#### Frame

Pressed one piece dual flange/frame from 0.7mm (24swg) for models CAD1, CAD2 and CAD3 with 0.8mm (22swg) for model CAD4 from galvanised mild steel to BS EN 10142 1991. Both the inner and outer flanges are pre-punched for easy on-site installation.

#### Latches

Zinc plated steel progressive cam fasteners and fastening clamps. Two sets for Models CAD1 and CAD2, four sets for Model CAD3 and CAD4. Cam locks are positioned at strategic locations for optimum closure and low leakage.

#### Security Chain

A retaining safety chain is fitted to both the door and the frame to alleviate damage or injury during routine maintenance or cleaning as well as negating loss.

### Weight Chart

| Model No.    | Nominal Size (mm) | No. per Carton | Weight Per Carton (kg) | Volume Per Carton (m <sup>3</sup> ) |
|--------------|-------------------|----------------|------------------------|-------------------------------------|
| <b>CAD 1</b> | 233 x 143         | 10             | 9kg                    | 0.025m <sup>3</sup>                 |
| <b>CAD 2</b> | 362 x 227         | 5              | 9kg                    | 0.025m <sup>3</sup>                 |
| <b>CAD 3</b> | 494 x 354         | 5              | 16kg                   | 0.047m <sup>3</sup>                 |
| <b>CAD 4</b> | 647 x 496         | 4              | 25kg                   | 0.076m <sup>3</sup>                 |

### Ordering Details

Example:

**Model CAD3 Size: 494mm x 354mm**

**Quantity: 20 (4 boxes)**

would be written as:

**CAD3 - 494x354 - 20**

### Air, Fire and Smoke Control Products in the BSB Range:



For full details of the complete BSB Product Range, please refer to our individual product brochures, sales office or website.

**BSB Engineering Services Limited**  
 Unit 56, Trinity Trade Centre, Mill Way, Sittingbourne, Kent ME10 2PD, UK • Tel: +44 (0)1795 422609 • Fax: +44 (0)1795 429543  
 For purchase orders and order related enquiries, please email: [orders@bsb-dampers.co.uk](mailto:orders@bsb-dampers.co.uk)  
 For pricing, technical and general enquiries, please email: [enquiries@bsb-dampers.co.uk](mailto:enquiries@bsb-dampers.co.uk)  
 Website: [www.bsb-dampers.co.uk](http://www.bsb-dampers.co.uk) • A member of the Maico group

BSB Engineering Services Ltd. reserves the right to modify or withdraw any specification without prior notice that may result from continuous product development. The information contained within this brochure is correct at the time of going to press. (CAD-04-2014)

